



Made of white polycarbonate (PMMA)
Operating Ambient Temperature: -30 TO 50

870-1200lm
Equipped high efficiency

CRI > 85

Tri-CCT
(3000K / 4000K / 6000K)

50,000Hrs


BENIFITS

Product description: This premium 3-CCT LED downlight offers seamless color-temperature switching via a built-in DIP switch, delivering 3000K, 4000K, or 6000K options to suit any environment. It's cost-effective solution with outstanding performance.

Easy installation: The installation process is simple, requiring almost no additional structural support. It can be completed in just a few simple steps, making it suitable for old house renovation or temporary setup.


Uniform light distribution: Ceiling lights typically provide uniform light distribution, avoiding localized glare or shadows. With sufficient illuminance, they create a comfortable indoor lighting environment and reduce eye strain.

INSTALLATION

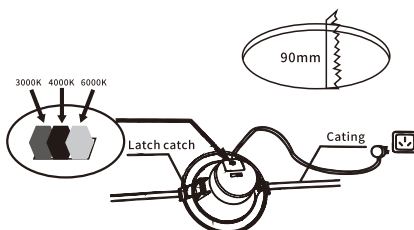

- 1.Ceiling Opening Hole: 90mm
- 2.Select CCT you need, then connected power supply.
- 3.Hold back spring clips,push downlight into position, done.

DIMENSIONS

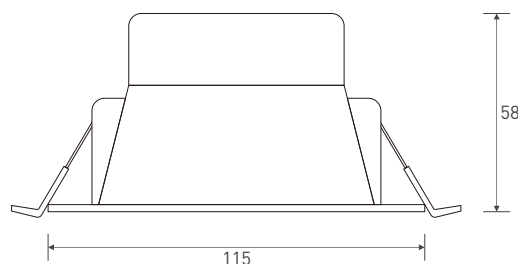

Single Size(D*H)	N.W/PCS	Box Size(L*W*H)	CTN Size(L*W*H)	G.W/CTN	PCS/CTN
φ 115x58mm	0.22Kg	124x124x70mm	370x265x395mm	7.6Kg	30pcs

SPECIFICATION PARAMETER

Part Number	Power	Voltage	Lumens	Type	BeamAngle	CRI	CCT	PF
AL8DL-JOEY	10W	200-240VAC,50/60Hz	870-1200lm	Flat	120°	>85	3000/4000/6000K	0.9
AL8DL-CUB	10W	200-240VAC,50/60Hz	870-1200lm	Recessed	110°	>85	3000/4000/6000K	0.9

All features and specifications are subject to change without prior notice. All rights reserved

Warranty: 2 years

Energy saving& enviroment friendly

The fitting can be completely covered by installation and is an excellent luminaire for any household looking to take the step into energy and cost efficient lighting.

Application

Bedroom,living room,dinning room, study room,balcony,corridor,passageway,hotel ,office,shopping mall.